


<b>Public information</b>	
Model identifier:	SKS-JZ-02
Supplier's name or trade mark	Shenzhen ShiKeShu. Optoelectronic Ltd.
<b>Type of light source</b>	
Lighting technology used	<input type="checkbox"/> HL <input type="checkbox"/> LFL T5 HE <input type="checkbox"/> LFL T5 HO <input type="checkbox"/> CFLni <input type="checkbox"/> other FL <input type="checkbox"/> HPS <input type="checkbox"/> MH <input type="checkbox"/> other HID <input checked="" type="checkbox"/> LED <input type="checkbox"/> OLED <input type="checkbox"/> mixed <input type="checkbox"/> other
Non-directional or directional	<input type="checkbox"/> Directional <input checked="" type="checkbox"/> Non-directional
Light source cap-type (or other electric interface)	Integration
Mains or non-mains	<input type="checkbox"/> Mains <input checked="" type="checkbox"/> Non-mains
Connected light source (CLS)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Colour-tuneable light source	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Envelope (other HID)	<input checked="" type="checkbox"/> No <input type="checkbox"/> Second <input type="checkbox"/> Non-clear <input type="checkbox"/> Second + Non-clear
High luminance light source:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Anti-glare shield	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Dimmable	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Only with specific dimmers
<b>General product parameters</b>	
Parameters	5V $\overline{=}$
Energyconsumption in on-mode (kWh/1000h)	10
Energy efficiency class	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input checked="" type="checkbox"/> E <input type="checkbox"/> F <input type="checkbox"/> G
Useful luminous flux (lm)	1300
Beam angle correspondence	<input checked="" type="checkbox"/> Sphere (360°) <input type="checkbox"/> Wide cone (120°) <input type="checkbox"/> Narrow cone (90°)
Correlated colour temperature type	<input checked="" type="checkbox"/> Single value <input type="checkbox"/> Range <input type="checkbox"/> Steps
Correlated colour temperature (K)	13000
On-mode power (W)	9.95
Standby power (W)	-
Networked standby power for CLS (W)	-
Colour rendering index	80
Colour rendering index range (Minimum)	80
Colour rendering index range (Maximum)	80
Outer dimensions (Height) (millimetre)	2150
Outer dimensions (Width) (millimetre)	125
Outer dimensions (Depth) (millimetre)	10
Claim of equivalent power	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
Equivalent power (W)	-
Chromaticity coordinates (x)	0.2404

Chromaticity coordinates (y)	0.3087
------------------------------	--------

**Spectral power distribution in the range 250 nm to 800 nm, at full-load**

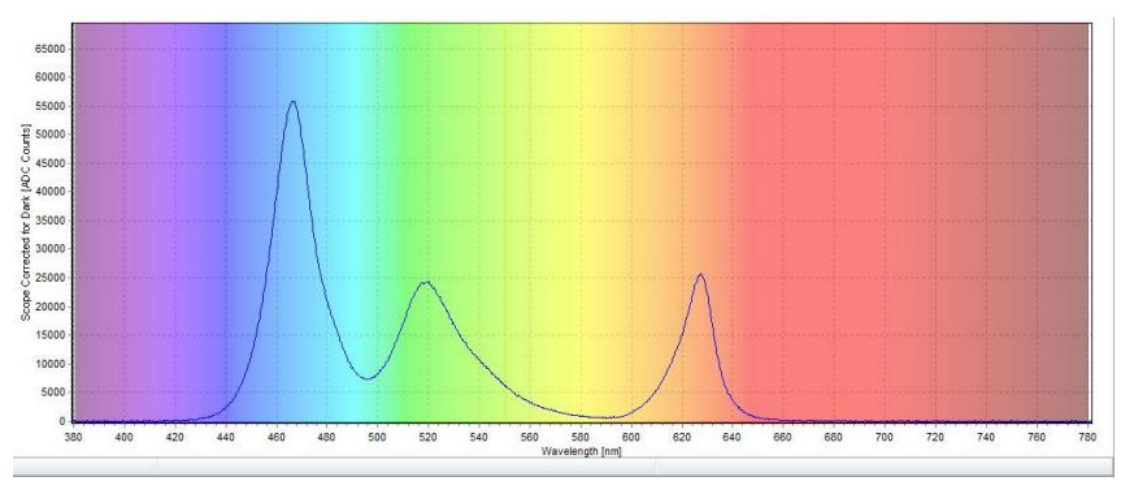

**Parameters for directional light sources**

Peak luminous intensity (cd)	118
Beam angle (degrees)	360
Beam angle (degrees) (Minimum)	360
Beam angle (degrees) (Maximum)	360

**Parameters for LED and OLED light sources**

R9 colour rendering index	0
Survival factor	1
Lumen maintenance factor	0.96

**Parameters for LED and OLED mains light sources**

Displacement factor	0.99
Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
Replacement claim (W)	-
Flicker metric	-
Stroboscopic effect metric	-